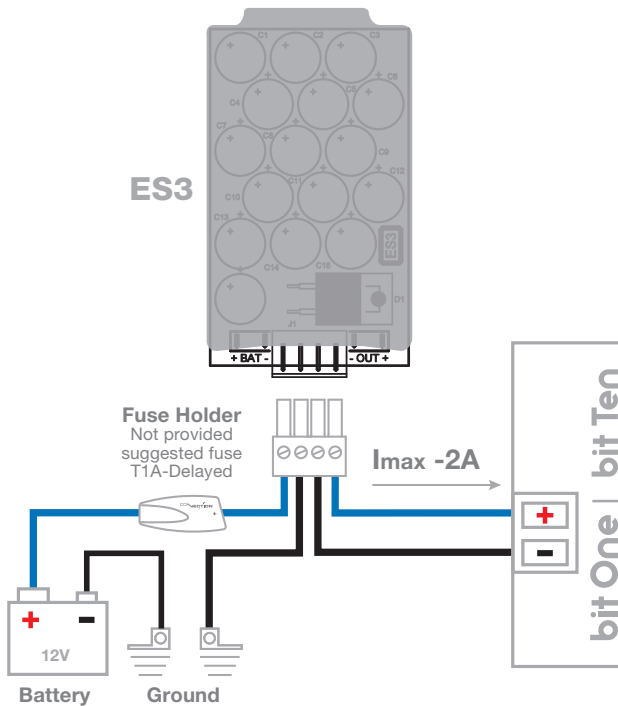


bit

ACCESSORIES

For bit One HD, bit One, bit Nove, bit Ten D, bit Ten

**ES3****BIT ENERGY STORAGE START & STOP**

It prevents the processor from shutting down when turning on vehicles featuring the start & stop system

When starting the engine, the vehicle battery voltage might decrease below 8 Volts value. If a signal processor (bit One, bit Ten) is installed in your system, especially with vehicles featuring the start & stop system, low supply voltage values might make the processor shut down. In order to avoid waiting for the processor to complete its turn-on cycle again, you can install the ES3 by connecting it in series to the processor power supply cables.

**ECK DRC****DRC CABLE EXTENSION KIT**

It is a kit composed of a cable and an adapter allowing a 2 m / 78.74 in. additional extension of the cable supplied with the DRC. This extension is required for installations on especially long vehicles such as SUV's. Total length of the supplied cable with the extension is equal to 6,5 m / 225.90 in.

PACKAGE: Polybag - Qty. 1

bit

ACCESSORIES

For bit One HD, bit One, bit Nove, bit Ten D

Optical digital audio signal cable, designed for car audio applications, allowing the transfer of the optical signal along its 10 m / 393.70 in. length without signal loss. An especially thicker sheath protects the optical fibre to prevent the cable from damages if it is pressed against sharp edges. The metal connector protects the optical fibre along its full length, ensuring a stable transmission of the signal also in the event of strong vibrations.

**OP 1.5****TOSLINK OPTICAL CABLE 1,5 M / 59.05 IN.**

Optical cable ending with Toslink connectors for S/PDIF digital audio signals. Cable length 1,5 m/59,05"

PACKAGE: Polybag Qty. 1

**OP 4.5****TOSLINK OPTICAL CABLE 4,5 M / 177.16 IN.**

Optical cable ending with Toslink connectors for S/PDIF digital audio signals. Cable length 4,5 m/177,16"

PACKAGE: Polybag Qty. 1

**STR****M TO F RIGHT ANGLE TOSLINK ADAPTER**

Male-Female Toslink adapter with rotating head. 90° angle shape to save space.

PACKAGE: Polybag Qty. 1

**STA****F/F SOCKET TOSLINK ADAPTER**

Optical adapter to extend optical cables featuring TOSLINK connectors.

PACKAGE: Polybag - Qty. 1

For bit Ten, bit Ten D, bit Nove

**PIC 6****PRE IN CONNECTOR 6**

RCA connector for effortless and fast connections between the head unit PRE OUTs (1,2 min.) and the bit Nove PRE inputs.

PACKAGE: Carton Box - Qty. 1

**CBT 1****RCA BIT TEN ADAPTER CABLE**

RCA connector for effortless and fast connections between the head unit PRE OUTs (2 V min.) and bit Ten, bit Ten D Hi-Level inputs.

PACKAGE: Carton Box - Qty. 1