




1" Ceramic Horn Tweeter

Program Power	300 W
Rated impedance	4 Ohm
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	105 dB
Voice coil diameter	1 in - 25 mm
Frequency Range	3000-20000 Hz

SPECIFICATIONS

Nominal Diameter	1" - 26 mm	
Rated Impedance	4 Ohm	
Nominal Power Handling ¹	150 W	
Program Power ²	300 W	
Sensitivity ³	105 dB	
Frequency Range ⁴	3000-20000 Hz	
Minimum Impedance	-	
Flange material	-	
Magnet Material	Ferrite	
Diaphragm Material	Aluminum	
Diaphragm Shape	Planar	
Surround	-	
Voice Coil Diameter	1 in - 25 mm	
Voice Coil Winding Material	-	
Voice Coil Former Material	Kapton	
Flux Density	-	
Ferrofluid	Yes	
Connection type	Faston	
Recommended Crossover Frequency	-	
Alternative Available Version	8 Ohm	PT262

FREQUENCY RESPONSE AND IMPEDANCE CURVE ^{6 7}

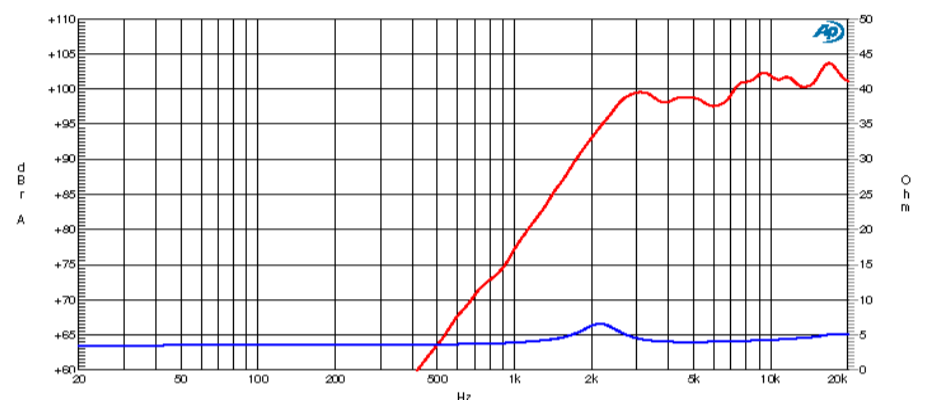

T/S PARAMETERS

4 Ohm

Resonance frequency	Fs	1800 Hz
DC Resistance	Re	3,2 Ohm
Mechanical Q Factor	Qms	0
Electrical Q Factor	Qes	0
Total Q Factor	Qts	0
BI Factor	Bl	-
Effective Moving Mass	Mms	-
Suspension Compliance	Cms	-
Effective Piston Diameter	D	0 -
Effective piston area	Sd	0 -
Voice Coil Inductance @ 1kHz	Le	0,02 mH

NOTES

¹ Nominal power is determined according to AES2-1984 (r2003) standard.

² Program Power is defined as 3 dB greater than the Nominal rating.


³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.

⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.

⁵ Linear Math. Xmax is calculated as $(Hvc-Hg)/2 + Hg/4$ where Hvc is the coil depth and Hg is the gapdepth.

⁶ Frequency response curve is measured on IEC Baffle.

⁷ Impedance curve is measured in free air conditions at small signals.



MOUNTING AND SHIPPING INFORMATION

Overall Diameter	130 mm - 5,12 in
Baffle Cutout Diameter	90 mm - 3,54 in
Flange Thickness	2 mm - 0,08 in
Total Depth	44,5 mm - 1,75 in
Bolt Circle Diameter	116 mm - 4,57 in
Bolt Holes Quantity and Diameter	4 / 5 mm - 0,2 in
Net Weight	1,15 Kg - 2,53 lb
Shipping Units	6 Pcs